


THE MZC-II AL DAIRY

Opening at both ends is the standard for rotary valves for dairy execution


The rotor can be rotated freely

Finger-safe rotor extraction

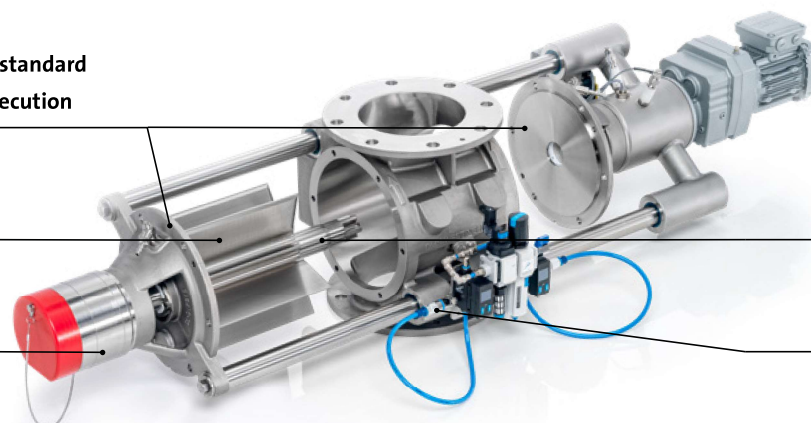

Due to the unique shape of the drive shaft, the rotor will self-align with the drive side

Quick release air connections

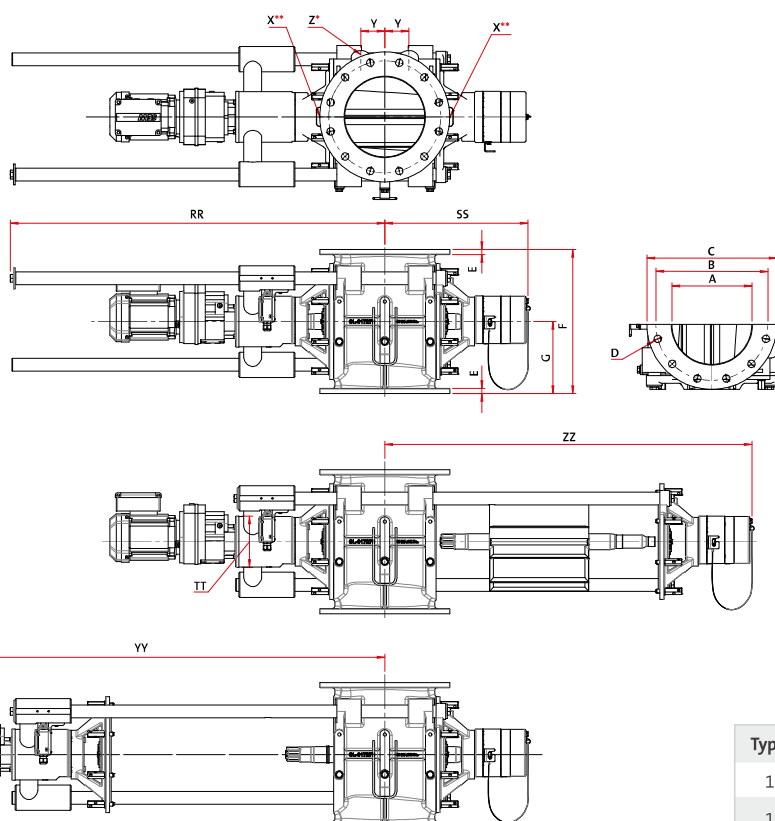

Unique features

- ▶ Unprecedented cleanability
- ▶ Easier and safer maintenance than ever before
- ▶ Standard opening at both ends for dairy execution
- ▶ Perfectly suitable for a broad range of industries



* Standard not pre-drilled

** Air purge connection

Technical modifications are possible, dimensions in mm

Type AL	YY	ZZ	Type SEW	≥Nm
150	1290	905	RF37	110
175	1350	965	RF37	150
200	1490	1085	RF47	210
250	1560	1160	RF47	285
300	1830	1370	RF57	410
350	1935	1475	RF57	560

Type AL	Ltr/rev	ØA	DIN			ANSI			E	F	G	X**	Y	Z*	RR	SS	TT
			ØB	D	ØC	ØB	D										
150	2,5	150	240	8xØ23	285	241,3	8xØ22,2		12	280	140	1/4"(Ø10)	40	UNEF 1 1/8"	910	370	120
175	5,5	175	270	8xØ23	315	----	----		14	330	165	1/4"(Ø10)	53	UNEF 1 1/8"	970	390	120
200	10,5	200	295	8xØ23	343	298,4	8xØ22,2		14	390	195	1/4"(Ø10)	65	UNEF 1 1/8"	1095	435	160
250	19	250	350	12xØ23	406	361,9	12xØ25,4		16	450	225	1/4"(Ø10)	75	UNEF 1 1/8"	1170	460	160
300	34	300	400	12xØ23	483	431,8	12xØ25,4		21	540	270	1/4"(Ø10)	95	UNEF 1 1/8"	1385	540	200
350	58	350	460	16xØ23	530	476,2	12xØ28,6		26	660	330	1/4"(Ø10)	112	UNEF 1 1/8"	1490	575	200