

MZC-II DAIRY **AL/AXL** **BL/BXL** **BXXL**






DMN
WESTINGHOUSE




THE FUTURE STANDARD FOR SAFETY,
HYGIENE AND CLEANABILITY

FUTURE-PROOF VALUE SINCE 1950

AL/AXL TYPE

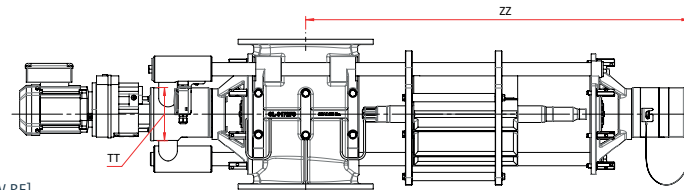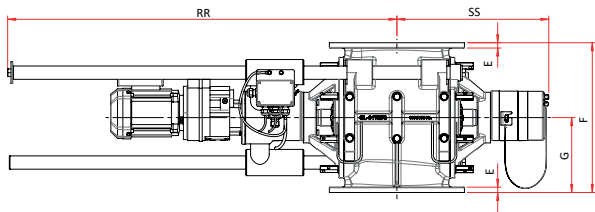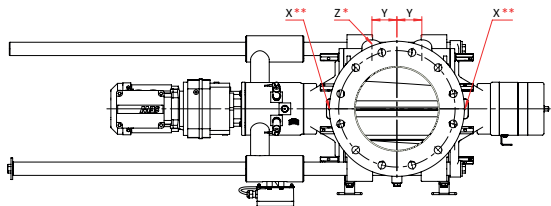

Direct drive with coupling [SEW RF]




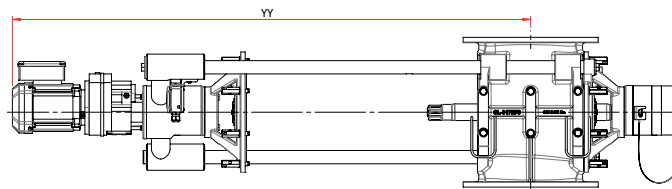


AL
Drop through
rotary valve

AXL
Drop through rotary valve with an enlarged inlet. Designed for products with poor flowability

				DIN			ANSI						DIN						ANSI												
AL	AXL	Ltr/rev	ØA	ØB	D	ØC	ØB	D	E	ØA	ØB	D	ØC	ØB	D	E	F	G	X**	Y	Z*	RR	SS	TT	YY	ZZ	Type SEW	≥Nm			
150		2,5	150	240	8xØ23	285	241,3	8xØ22.2	12								280	140	G1/4"(Ø10)	40	UNEF 1 1/8"	905	375	120	1285	900	RF37	110			
175	200	5,5	175	270	8xØ23	315	----	----	14	200	295	8XØ23	343	298,4	8xØ22.2	14	330	165	G1/4"(Ø10)	53	UNEF 1 1/8"	965	395	120	1345	960	RF37	150			
200	250	10,5	200	295	8xØ23	343	298,4	8xØ22.2	14	250	350	12XØ23	406	361,9	12xØ25.4	16	390	195	G1/4"(Ø10)	65	UNEF 1 1/8"	1095	435	160	1485	1080	RF47	210			
250	300	19	250	350	12xØ23	406	361,9	12xØ25.4	16	300	400	12XØ23	483	431,8	12xØ25.4	21	450	225	G1/4"(Ø10)	75	UNEF 1 1/8"	1170	460	160	1560	1155	RF47	285			
300	350	34	300	400	12xØ23	483	431,8	12xØ25.4	21	350	460	16XØ23	530	476,2	12xØ28.6	26	540	270	G1/4"(Ø10)	95	UNEF 1 1/8"	1385	600	200	1830	1425	RF57	410			
350		58	350	460	16xØ23	530	476,2	12xØ28.6	26								660	330	G1/4"(Ø10)	112	UNEF 1 1/8"	1490	635	200	1935	1530	RF57	560			
			AL MZC-II							AXL MZC-II																					

BL/BXL TYPE

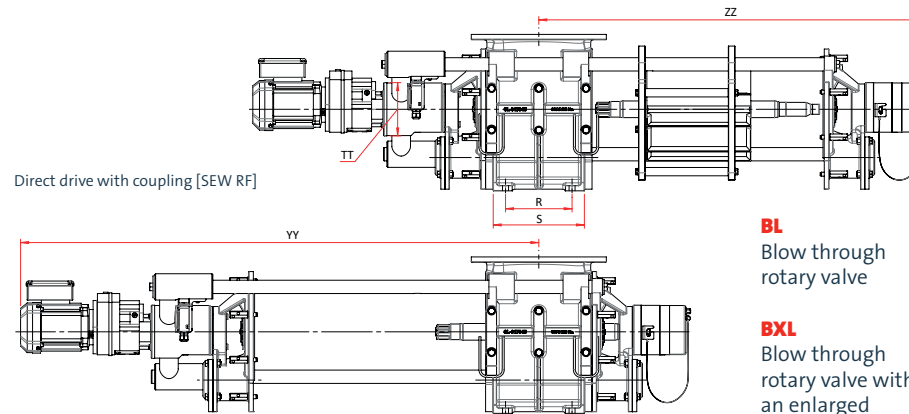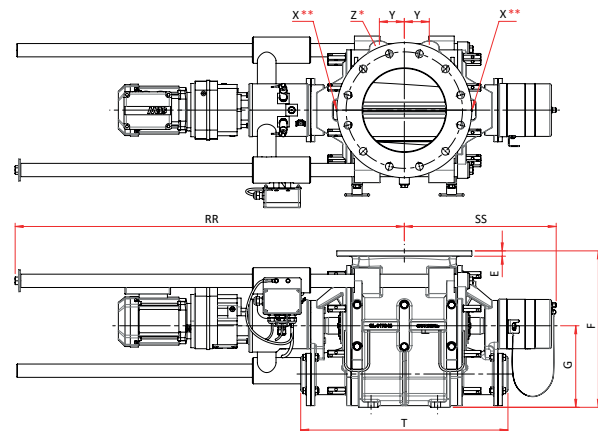

Direct drive with coupling [SEW RF]

BL
Blow through
rotary valve

BXL
Blow through rotary valve with an enlarged inlet. Designed for products with poor flowability

- THE MZC-II ROTARY VALVES OFFER YOU:**

- Opens on two sides for unprecedented easy access and superior cleanability
- Easier and safer maintenance than ever before
- Applications for a broad range of industries
- Cleaning In Place (CIP): the rotor remains in position during cleaning
- Additional safety through an integrated emergency safety switch
- Only a direct drive is offered, to allow for ease of opening and cleaning



- ★ By default not pre-drilled
- ★★ Air purge connection

Technical modifications are possible, dimensions in mm.

			DIN				ANSI				DIN				ANSI																															
BL	BXL	Ltr/rev	ØA	ØB	D	ØC	ØB	D	E	ØA	ØB	D	ØC	ØB	D	E	F	G	J	P	Q	R	S	T	W	X**	Y	Z*	LL	LL max.	RR	SS	TT	YY	ZZ	Type SEW	≥Nm									
150		2,5	150	240	8xØ23	285	241,3	8xØ22.2	12								295	155	65	110	140	100	154	462	4xØ12	G1/4" (Ø10)	40	UNEF 1 1/8"	35	50	905	375	120	1285	900	RF37	110									
175	200	5,5	175	270	8xØ23	315	----	----	14	200	295	8XØ23	343	298,4	8xØ22.2	14	340	175	75	130	160	130	190	502	4xØ14	G1/4" (Ø10)	53	UNEF 1 1/8"	50	65	965	395	120	1345	960	RF37	150									
200	250	10,5	200	295	8xØ23	343	298,4	8xØ22.2	14	250	350	12XØ23	406	361,9	12xØ25.4	16	410	215	90	160	200	160	230	572	4xØ18	G1/4" (Ø10)	65	UNEF 1 1/8"	50	80	1095	435	160	1485	1080	RF47	210									
250	300	19	250	350	12xØ23	406	361,9	12xØ25.4	16	300	400	12XØ23	483	431,8	12xØ25.4	21	470	245	100	170	210	200	274	622	4xØ18	G1/4" (Ø10)	75	UNEF 1 1/8"	70	100	1170	460	160	1560	1155	RF47	285									
300	350	34	300	400	12xØ23	483	431,8	12xØ25.4	21	350	460	16XØ23	530	476,2	12xØ28.6	26	565	295	120	190	240	260	350	724	4xØ23	G1/4" (Ø10)	95	UNEF 1 1/8"	100	125	1385	600	200	1830	1425	RF57	410									
350		58	350	460	16xØ23	530	476,2	12xØ28.6	26								665	335	132,5	220	270	310	406	794	4xØ23	G1/4" (Ø10)	112	UNEF 1 1/8"	125	150	1490	635	200	1935	1530	RF57	560									
		BL MZC-II								BXL MZC-II																																				

CONTACT

For more information and other inquiries, please contact us via our sales teams or distributors.
You can find the complete list of distributors at dmnwestinghouse.com/distributors.

THE NETHERLANDS

DMN-WESTINGHOUSE

+31 252 361 800
sales@dmnwestinghouse.com

FRANCE

DMN FRANCE SAS

+33 1 69 49 85 70
contact.fr@dmnwestinghouse.com

UK

DMN UK LTD

+44 1249 818 400
dmn.uk@dmnwestinghouse.com

GERMANY

DMN SGT GMBH

+49 4181 931 40
dmn.sgt@dmnwestinghouse.com

USA

DMN INC.

+1 870 733 9100
sales.us@dmnwestinghouse.com

INDIA

DMN INDIA PRIVATE LIMITED

+91 9940482573
india@dmnwestinghouse.com

BXXL TYPE

BXXL

Blow through rotary valve with an extra enlarged inlet. Designed for products with poor flowability

BXXL	Ltr/ rev	DIN			ANSI			E	F	G	J	P	Q	R	S	T
		ØA	ØB	D	ØC	ØB	D									
350	19	350	460	16xØ23	530	476,2	12xØ28.6	26	535	245	100	170	210	200	274	622

BXXL	W	X**	Y	Z*	LL	LL max.	RR	SS	TT	YY	ZZ	Type SEW	≥Nm
350	4XØ18	G1/4"(Ø10)	75	UNE F 1 1/8"	70	100	1170	460	160	1560	1155	RF47	285